

# PACKET RADIO SYSTEM, AND A TERMINAL EQUIPMENT FOR A PACKET RADIO SYSTEM

Publication number: JP10512120 (T)

Publication date: 1998-11-17

Inventor(s):

Applicant(s):

Classification:

- international: H04L12/56; H04L29/06; H04W76/04; H04W88/16; H04W92/02; H04L12/56; H04L29/06; H04W76/00; H04W88/00; H04W92/00; (IPC1-7): H04L12/56; H04Q7/38

- European: H04Q7/22S3P; H04L12/56B; H04L29/06; H04W76/04

Application number: JP19960521460T 19960108

Priority number(s): WO1996F100020 19960108; F119950000117 19950110

Also published as:

WO9621984 (A2)

WO9621984 (A3)

US5978386 (A)

NO973176 (A)


FI950117 (A)

more >>

Abstract not available for JP 10512120 (T)

Abstract of corresponding document: WO 9621984 (A2)

A packet radio system encapsulates data packets of external data networks by a point-to-point protocol PPP (Fig. 4A, 4B), and passes them through one or more sub-networks to a point which supports the protocol of the encapsulated data packet. In addition, a special radio link protocol of the packet radio network is required on the radio interface between a mobile data terminal equipment and a support node. PPP packets are encapsulated in data packets of said radio link protocol. The disadvantage of the arrangement is that the data packets of both the PPP protocol and the radio link protocol contain protocol-specific control fields, which reduces the transmission capacity of user information. Therefore, a PPP packet is compressed (Fig. 4C) before the encapsulation (Fig. 4D) by removing therefrom the unnecessary control fields. After having been transferred over the radio interface, the PPP packet is decompressed into its original format (Fig. 4F, 4G).

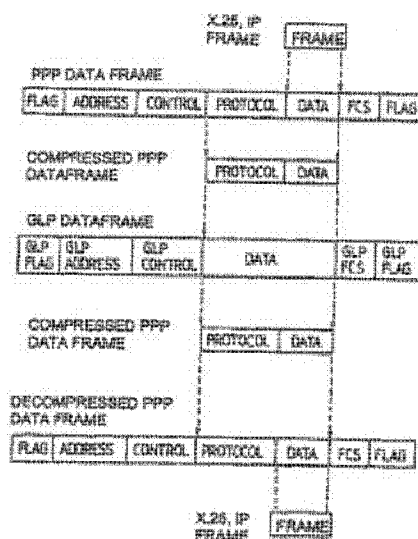

Data supplied from the **espacenet** database — Worldwide